



**ENGINEERED PRODUCTS**  
www.kinesik.ca

© KINESIK ENGINEERED PRODUCTS  
CONFIDENTIAL AND PROPRIETARY DOCUMENT  
ANY ONE OR MORE OF THE FOLLOWING PATENTS MAY APPLY:  
U.S. PATENT NO. 5 303 089, 5 775 835, 6 448 790, AND 6 885 622 IS,  
C.D.N. PATENT NO. 2 032 532, 2 070 984,  
US PATENTS PENDING.  
© KENNETH E. SZEKELY

MATERIAL LIST			
ITEM	DESCRIPTION	PART NO.	QTY
1	ARMOR-TILE	ADA-P-1212	1


REFERENCE DRAWINGS	
DWG. NO.	DESCRIPTION

NO.	DATE	REVISION	APPR.


SCALE AS NOTED	
DESIGNED KES	DATE 08/1990
DRAWN BL	04/2015
CHECKED	
PROJECT MANAGER	
TRADE TWSI	PART NO. ADA-P-1212

MATERIAL VITRIFIED POLYMER COMPOSITE  
SUBJECT **Armor-Tile™**  
SOUND AMPLIFYING TACTILE WALKING SURFACE INDICATOR TILE  
PROJECT TACTILE WALKING SURFACE INDICATOR TILE  
305 x 305 MODULAR PAVER  
INLINE DOME  
PLANS AND DETAILS


DRAWING NO. ADA-P-1212	REV. NO. 0
------------------------	------------

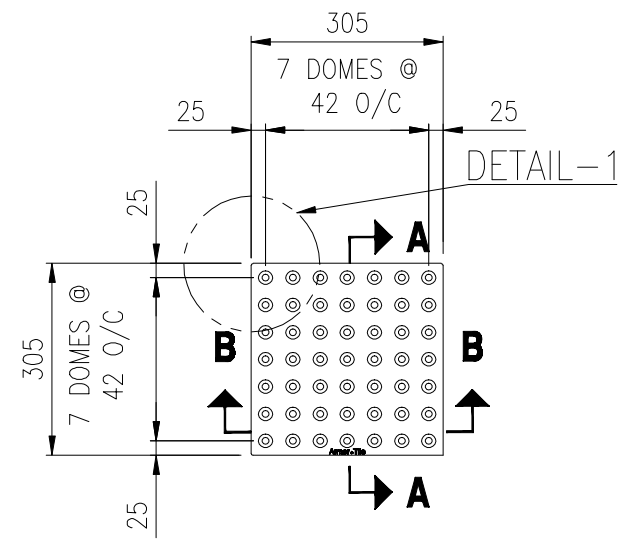


PLAN

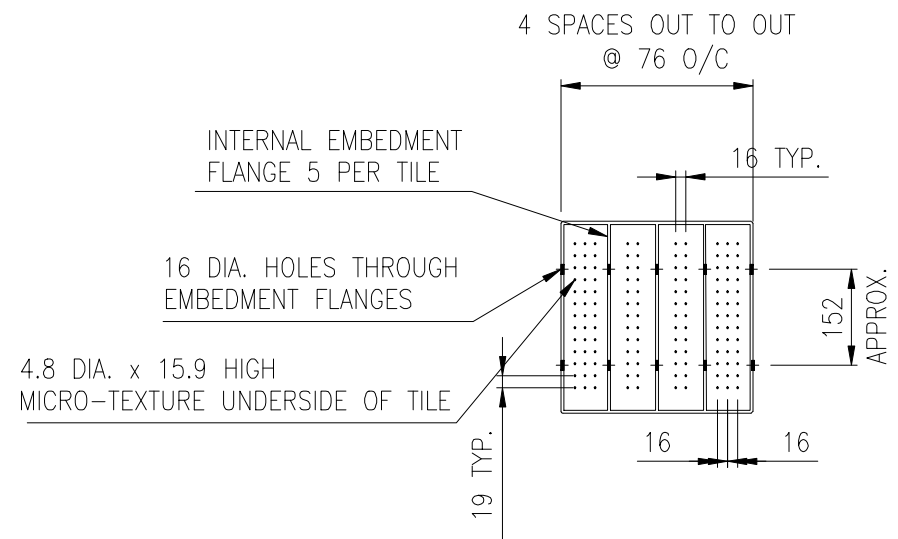


REFLECTED PLAN

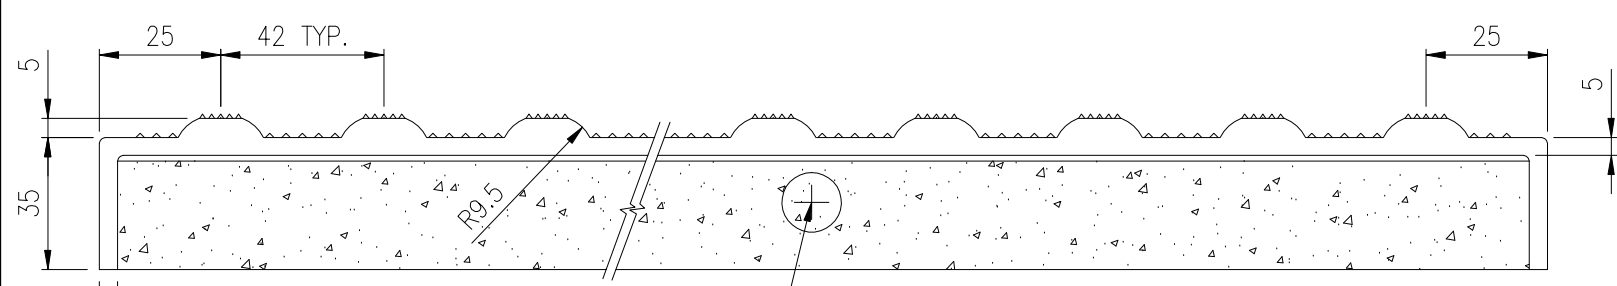

SECTION A-A

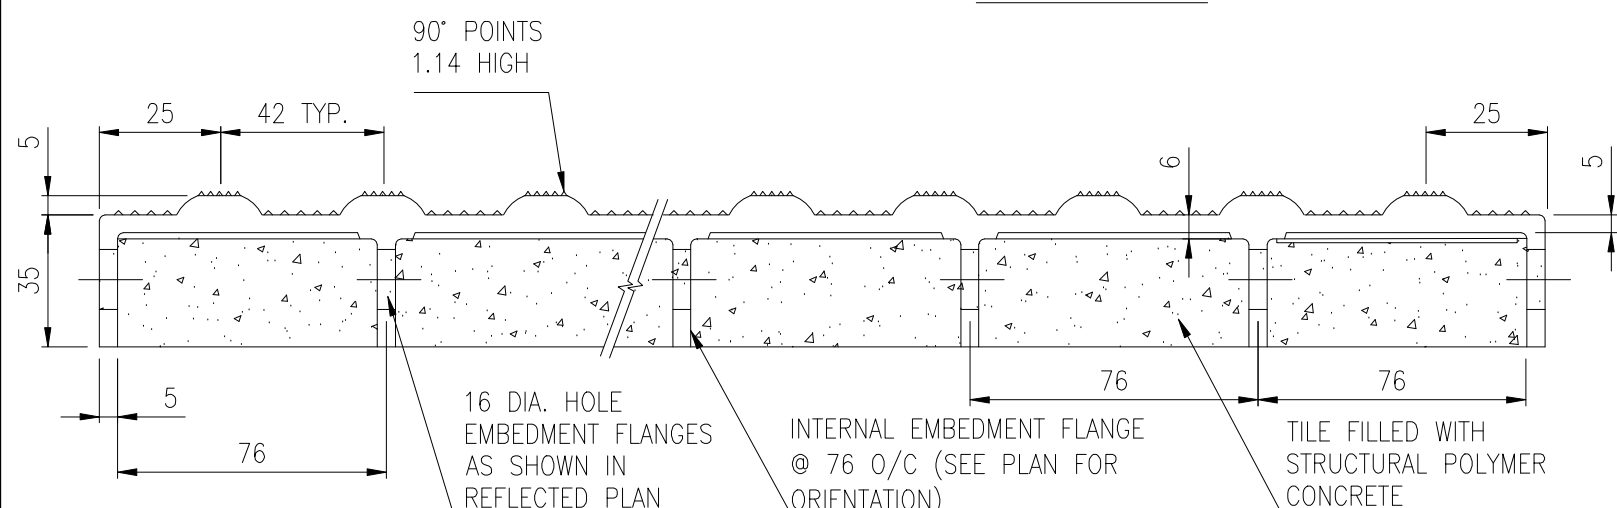

SECTION B-B

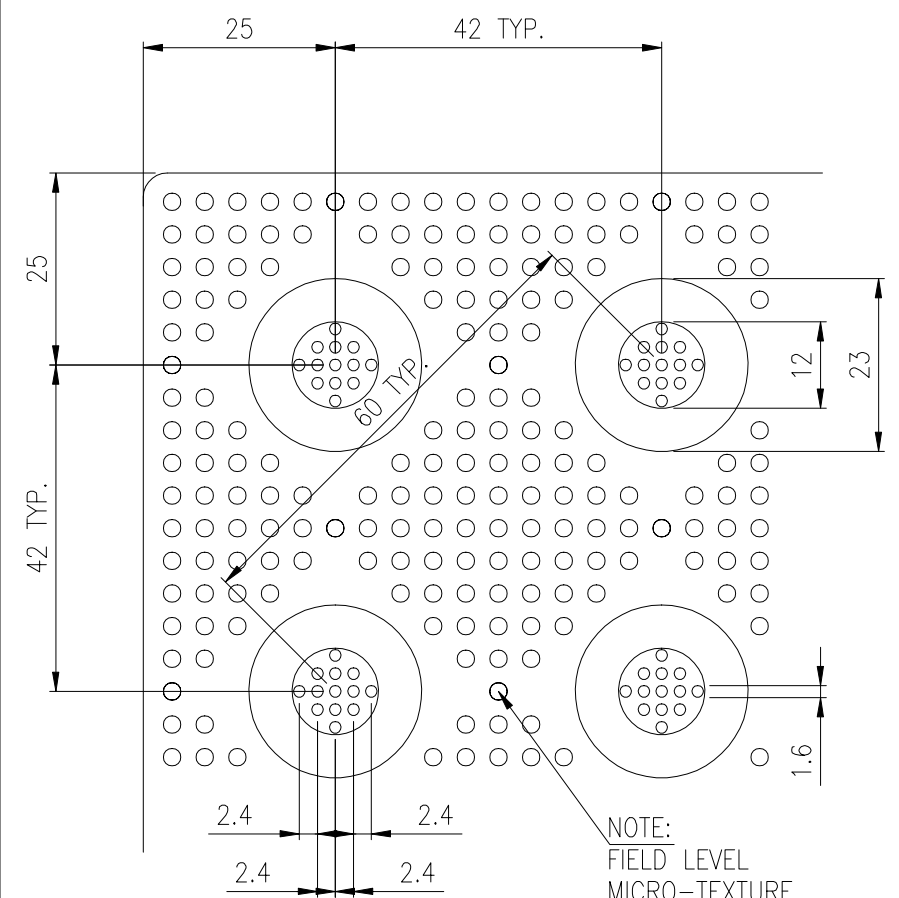

DETAIL-1 (FULL)

NOTE: FIELD LEVEL MICRO-TEXTURE 41 POINTS PER SQUARE INCH



**ENGINEERED PRODUCTS**  
www.kinesik.ca

© KINESIK ENGINEERED PRODUCTS  
CONFIDENTIAL AND PROPRIETARY DOCUMENT  
ANY ONE OR MORE OF THE FOLLOWING PATENTS MAY APPLY:  
U.S. PATENT NO. 5 303 089, 5 775 835, 6 448 790, AND 6 985 622 B2,  
C.D.N. PATENT NO. 2 032 532, 2 070 984,  
US PATENTS PENDING.

© KENNETH E. SZEKELY

MATERIAL LIST

ITEM	DESCRIPTION	PART NO.	QTY
1	ARMOR-TILE	ADA-P-2424	1

REFERENCE DRAWINGS

DWG. NO.	DESCRIPTION

NO.	DATE	REVISION	APPR.

SCALE AS NOTED

DESIGNED KES DATE 08/1990

DRAWN BL DATE 04/2015

CHECKED

PROJECT MANAGER


TRADE PART NO. ADA-P-2424

MATERIAL VITRIFIED POLYMER COMPOSITE

SUBJECT  
**Armor-Tile™**  
SOUND AMPLIFYING TACTILE  
WALKING SURFACE INDICATOR TILE

PROJECT  
TACTILE WALKING SURFACE INDICATOR TILE  
810 x 610 MODULAR PAVER  
INLINE DOME  
PLANS AND DETAILS

DRAWING NO. ADA-P-2424 REV. NO. 0


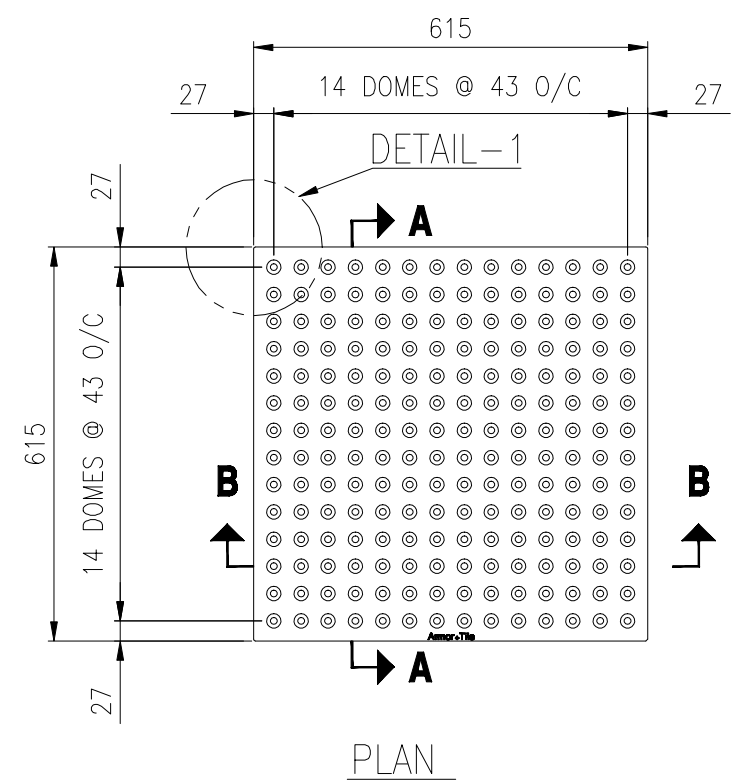


INTERNAL EMBEDMENT FLANGE 9 PER TILE

8 SPACES OUT TO OUT @ 77 O/C NOM.


4.8 DIA. x 1.6 HIGH MICRO-TEXTURE UNDERSIDE OF TILE

16 DIA. HOLES THROUGH EMBEDMENT FLANGES

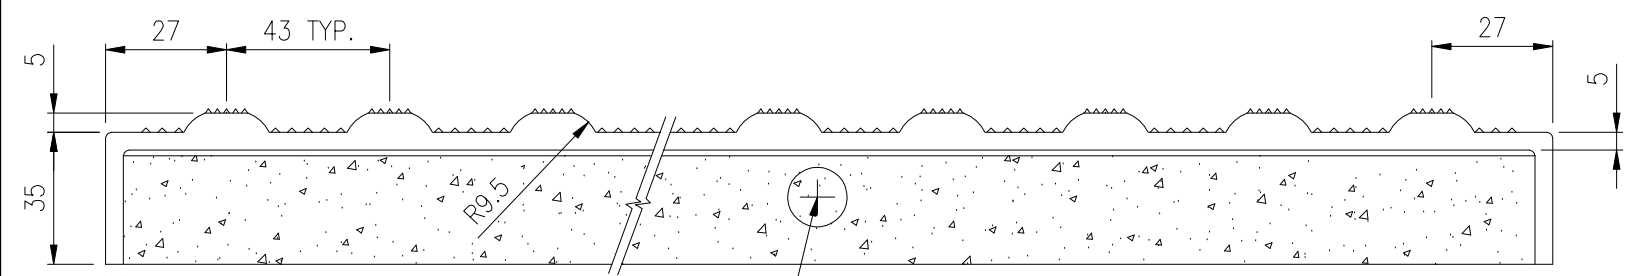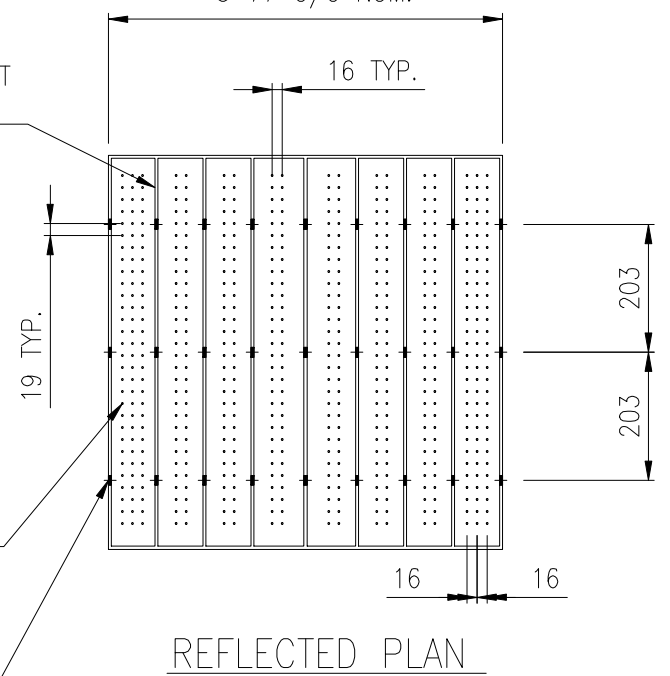

16 HOLE THROUGH EMBEDMENT FLANGES AS SHOWN IN REFLECTED PLAN CENTERED TYP.

SECTION A-A

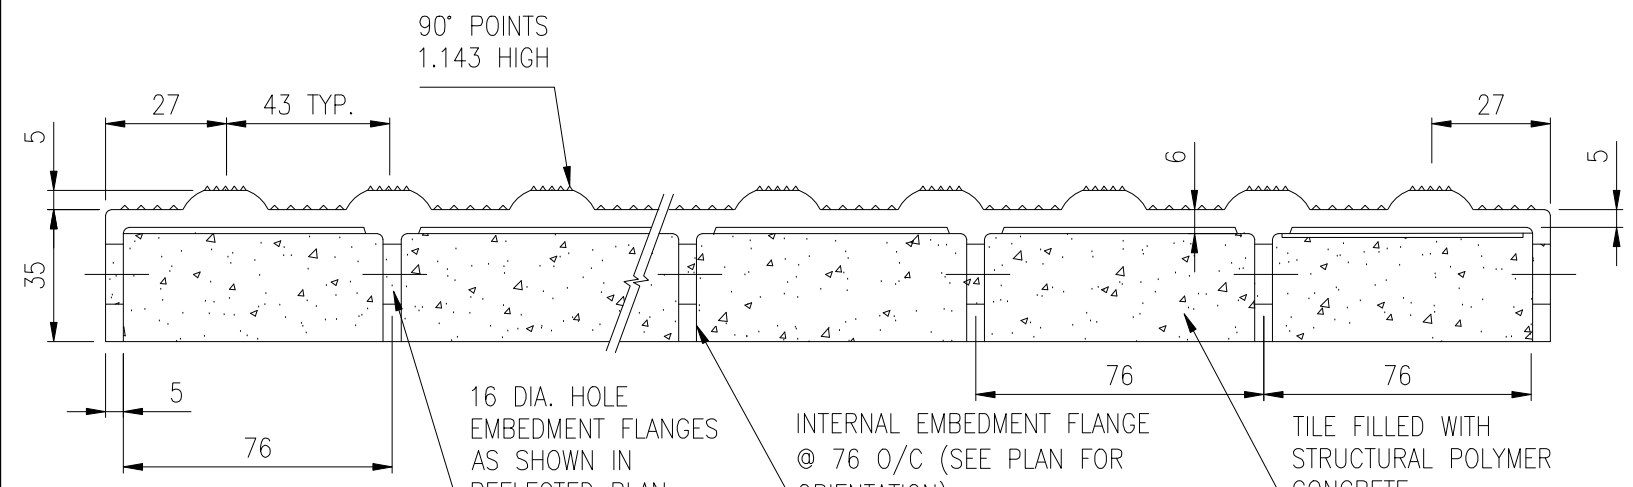


90° POINTS 1.143 HIGH

16 DIA. HOLE EMBEDMENT FLANGES AS SHOWN IN REFLECTED PLAN

INTERNAL EMBEDMENT FLANGE @ 76 O/C (SEE PLAN FOR ORIENTATION)

TILE FILLED WITH STRUCTURAL POLYMER CONCRETE

SECTION B-B

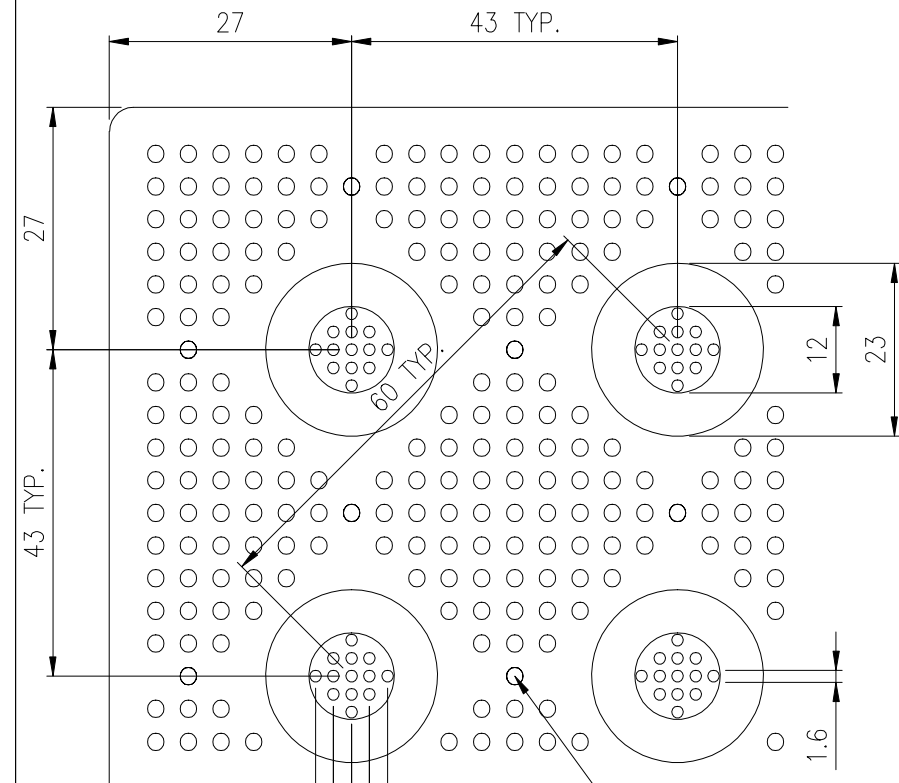

NOTE: FIELD LEVEL MICRO-TEXTURE 41 POINTS PER SQUARE INCH

DETAIL-1 (FULL)